

THE POSSIBILITIES ARE INFINITE

FUJITSU

A4 COLOR
DUPLIX
DOCUMENT
SCANNER


fi-4120C2

Image Scanner



- A4
- ADF
- Straight Path
- DUPLIX
- COLOR
- IR Multi Feed Detection Sensor
- Ultra SCSI
- USB 2.0/1.1
- Mono. 50 A4 ipm
- Color 50 A4 ipm
- 600 dpi

- Win 95
- Win 98SE
- Win Me
- Win NT4.0
- Win 2000 Professional
- Win XP

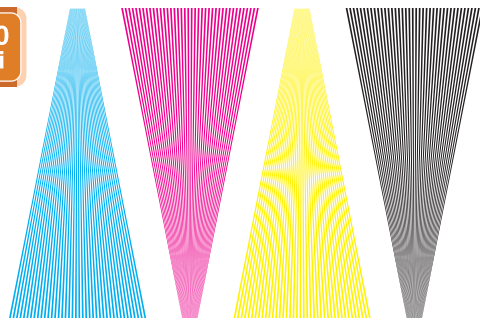

Adobe® Bundled!
Acrobat® 6.0
Standard

● Convert any document to a PDF file

for Microsoft® Windows®
Operating Systems



● FUJITSU TWAIN Driver

POWERED BY



● Genuine Pixel Translations ISIS driver



As an ENERGYSTAR® Partner, Fujitsu has determined that this product meets the ENERGYSTAR® guidelines for energy efficiency. ENERGYSTAR is a U.S. registered mark.

QUALITY SCANNER

fi-4120C2 Image Scanner

TECHNICAL SPECIFICATIONS

The fi-4120C2 image scanner with dual interface capability (Ultra SCSI and USB 2.0) expands the market for production scanning. These features will insure Fujitsu's customers' productivity well into the future.

- Fastest scanning speed in its class
 - 25ppm / 50ipm A4 portrait at 150dpi (Color)
 - 25ppm / 50ipm A4 portrait at 200dpi (Monochrome)
- Small Footprint
(W) 301 x (D)168 x (H)158mm
- Superior paper handling
 - 50 sheets ADF capacity
 - IR multi feed detection
 - De-skew & auto-cropping (TWAIN & ISIS Driver)
 - Straight paper path and easy maintenance
- Excellent image quality
 - Optical resolution 600dpi
 - Selectable background (B&W)
 - Image processing software V2.0 (Option)
- Dual Ultra SCSI and USB 2.0 interface
- Imprinter(Option)
 - Imprinter simplifies document management by permitting document names or codes to be printed on scanned documents



Scanner Type		ADF (Automatic Document Feeder)
Image Sensor Type		Color CCD (Charge-Coupled Device) x 2
Light Source		White cold cathode discharge lamp
Optical Resolution		600 dpi
Output Resolution	Color	50 - 600 dpi
	Grayscale	50 - 600 dpi
	Monochrome	50 - 600 dpi
AD Converter		1024 levels
Gray Scale Level	Color	8 bit and 24 bit / pixel
	Grayscale	8 bit / pixel
	Monochrome	1 bit / pixel
Scanning Speed (A4 portrait)	Color 150 dpi	25 ppm (Simplex) / 50 ipm (Duplex)
	Monochrome 200 dpi	25 ppm (Simplex) / 50 ipm (Duplex)
Document Size	Minimum	A8 (53 x 74 mm)
	Maximum	A4 (210 x 297 mm) or legal (215.9 x 355.6 mm)
Document Weight (Thickness)		52 to 127 g/m ² , or 14 to 34 lb
Capacity		Maximum 50 sheets at A4, 20 lb, or 80 g/m ²
Interface		Ultra SCSI (half-pitch 50 pin) x 1, USB 2.0 x 1 *Also works with USB 1.1
Connector Shape		Shield type 50 pin (pin type 50 pin);USB (B type)
Image Processing		Image emphasis, simplified DTC, error diffusion, dither, moire removal
Voltage or Voltage Range		AC 100 to 240 V, +10 % / -10 %
Power		Operating: 28 W Sleep mode: less than 6 W
Operational Environment	Temperature	5 to 35 degree C (42 to 95 degree F)
	Relative humidity	20 to 80 % (non-condensing)
Dimensions	Width	301 mm (11.9 in)
	Depth	168 mm (6.6 in)
	Height	158 mm (6.2 in)
Weight		3.5 kg (7.7 lb)
Option		Imprinter fi-412PR (Post printing)
Others	Multi feed detection	Yes, IR multi feed detection sensor
	Long paper scanning	863 mm(34 in), binary/grayscale/color
	Paper counter	Yes

■ Consumables

Pad ASSY	PA03289 - 0111	Lifetime: Every 50,000 sheets or one year
Pick Roller	PA03289 - 0001	Lifetime: Every 100,000 sheets or one year
Print Cartridge	CA00050 - 0262	Lifetime: Every 4,000,000 characters or 6 months

Microsoft, Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries.
 ISIS, QuickScan and their respective logos are trademarks or registered trademarks of Pixel Translations, a division of Captiva Software Corporation.
 Adobe, Adobe logo and Acrobat are either registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.
 Other product names are the trademarks or registered trademarks of the respective companies.
 Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition August 2004

Japan contact

PFU LIMITED
 International Sales Dept., Imaging Business Div.
 Products Group
 Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,
 Kawasaki-city, Kanagawa 212-8563, Japan
 Phone: (81-44) 540-4658 Fax: (81-44) 540-4639
<http://imagescanner.fujitsu.com/>

XXXXXXXX contact

FUJITSU x x x x x x
 x x x x x x x x x x x
 x x x x x x x x x x x
 x x x x x x x x x x x
 x x x x x x x x x x x
 x x x x x x x x x x x
 Phone: (1-23) 456-7890 Fax: 123-456
<http://www.x x x x .com/>

